

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 199933929 B2**  
**(10) Patent No. 731369**

**(54) Title**  
**Method for calculating the optimal number of BTSs in a cellular network and determining a loading factor value therefor**

**(51)<sup>7</sup> International Patent Classification(s)**  
**H04Q 007/22**

**(21) Application No: 199933929**

**(22) Application Date: 1999.06.08**

**(30) Priority Data**

<b>(31) Number</b>	<b>(32) Date</b>	<b>(33) Country</b>
<b>98/023184</b>	<b>1998.06.19</b>	<b>KR</b>

**(43) Publication Date : 2000.01.06**

**(43) Publication Journal Date : 2000.01.06**

**(44) Accepted Journal Date : 2001.03.29**

**(71) Applicant(s)**  
**Samsung Electronics Co, Ltd**

**(72) Inventor(s)**  
**Sang-jun Lee; Byung-chul You**

**(74) Agent/Attorney**  
**WRAY and ASSOCIATES, PO Box 6292, Hay Street, EAST PERTH WA 6892**

**(56) Related Art**  
**US 5561839**  
**EP 624961**  
**GB 2236457**

**BEST AVAILABLE COPY**

## ABSTRACT

A method is disclosed for calculating the number of base transceiver stations (BTSs) in a cellular network and for determining a loading factor value therefor. The method calculates the number of BTSs required to service a desired number  
5 of subscribers as a function of loading factor value. The method also calculates the number of BTSs required to cover a desired service area as a function of loading factor value. A value for the loading factor that minimises the difference between the number of BTSs required to service the desired number of subscribers and cover the service area. The required number of BTSs is then  
10 determined using this loading factor value.

**AUSTRALIA**

*Patents Act 1990*

**ORIGINAL**

**COMPLETE SPECIFICATION**

**STANDARD PATENT**

Name of Applicant: Samsung Electronics Co, Ltd

Actual Inventors Sang-jun LEE and Byung-chul YOU

Address for service is: WRAY & ASSOCIATES  
239 Adelaide Terrace  
Perth, WA 6000

Attorney code: WR

Invention Title: "Method For Calculating The Optimal Number of BTSs in a Cellular Network And Determining A Loading Factor Value Therefor"

The following statement is a full description of this invention, including the best method of performing it known to me:-

## TITLE

Method For Calculating The Optimal Number Of BTSs In A Cellular Network And  
Determining A Loading Factor Value Therefor

## FIELD OF THE INVENTION

- 5 The present invention relates to a method for calculating the optimal number of base transceiver stations in a cellular network and for determining a loading factor value therefor. The method is particularly useful to calculate the number of base transceiver stations required to satisfy both service area and subscribers when designing a cellular network.

## BACKGROUND ART

10

In a cellular mobile telecommunication system, the total service area is divided into a plurality cells, each of which is controlled by a base transceiver station (BTS). These BTSs are controlled by a mobile switching center (MSC), which enables subscribers to maintain communication when moving between cells.

- 15 BTSs are typically connected to the MSC by a wire link and the MSC is connected to another MSC or a public switched telephone network (PSTN).

In a cellular mobile telecommunication system, a mobile station's communication frequency is not fixed, but is automatically synchronised to a frequency designated by the BTS. In traditional cellular mobile telecommunication systems, neighbouring cells must use different frequencies to avoid interference, though cells far away can use the same frequency. Because the cellular mobile telecommunication system can reuse frequencies by dividing the service area into cells, it increases efficiency of frequency usage and can accommodate more subscribers.

- 25 A cellular mobile telecommunication system which uses code division multiple access (CDMA) can accommodate a plurality of subscribers on a single frequency by using codes. FIG. 1 shows the well-known structure of a typical CDMA network. In FIG. 1, base transceiver stations (BTSs) 10, 11, 12 and 13, base station controllers (BSCs) 20 and 21 and a mobile switching center (MSC) 30 are

As shown in the two examples, there is a big difference between the number of BTSs required to accommodate the given subscribers and the number of BTSs required to cover the given service area. This is because the chosen loading factor value may not be appropriate for the network morphology.

- 5 Because the prior art uniformly uses an arbitrary loading factor value regardless of the network criteria, it is impossible to calculate the number of BTSs required to accommodate the given subscribers and service area.

#### DISCLOSURE OF THE INVENTION

- 10 Throughout the specification, unless the context requires otherwise, the word "comprise" or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.

- 15 The present invention seeks to provide a method for calculating the optimal number of BTSs that will accommodate both a given subscriber amount and service area.

The present invention also seeks to provide a method for calculating an optimal loading factor value in a systematic manner, based on network criteria such as subscriber level and service area.

- 20 In accordance with a first aspect of this invention, there is provided a method for calculating the optimal number of base transceiver stations in a cellular network covering a service area, comprising the steps of:

calculating a first number of base transceiver stations required to service a desired number of subscribers as a function of a loading factor;

- 25 calculating a second number of base transceiver stations required to cover the service area as a second function of the loading factor;

selecting a value for the loading factor that minimises the difference between said first number of base transceiver stations and said second number of base transceiver stations; and



calculating the optimal number of base transceiver stations using the selected value for the loading factor.

Preferably, in said selecting step, said value for the loading factor is chosen at a position where the number of base transceiver stations required to service a  
5 desired number of subscribers coincides with the number of base transceiver stations required to cover the service area.

In accordance with a second aspect of this invention, there is provided a method for calculating the optimal value for a loading factor in a cellular network covering a service area, comprising the steps of:

- 10        calculating a first number of base transceiver stations required to service a desired number of subscribers as a function of the loading factor;  
  
          calculating a second number of base transceiver stations required to cover the service area as a second function of the loading factor;  
  
          selecting a value for the loading factor that minimises the difference  
15        between said first number of base transceiver stations and said second number of base transceiver stations.

Preferably, in said selecting step, said value for the loading factor is chosen at a position where the number of base transceiver stations required to service a desired number of subscribers coincides with the number of base transceiver  
20 stations required to cover the service area.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described with reference to two embodiments thereof and the accompanying drawings, in which:

FIG. 1 shows a code division multiple access cellular network;

- 25        FIG. 2 is a graph of the number of BTSs required for a given subscriber amount as a function of loading factor value;



FIG. 3 is a graph of the number of BTSs required to cover a given service area as a function of loading factor value;

FIG. 4 is a graph superimposing FIGs. 2 and 3 to determine a loading factor value;

- 5 FIG. 5 is a flow chart of the method for calculating the optimal number of BTSs in a cellular network according to the first embodiment of the invention; and

FIG. 6 is a flow chart of the method for calculating an optimal value for loading factor in a cellular network according to the second embodiment of the invention.

#### BEST MODE(S) FOR CARRYING OUT THE INVENTION

- 10 The embodiments will be described with reference to determining the optimal number of BTSs for a code division multiple access cellular network. For the purposes of the embodiments, the cellular network is assumed to relate to a region C having 50,000 subscribers within a service area of 3,000km<sup>2</sup>. The morphology of the region C is assumed to be 10% dense urban district, 20% urban district, 20% sub-urban district and 50% rural district. Further, it is assumed that 70% of the subscribers are in a sectored cell and the remaining 30% are in an omni-cell. It should be appreciated that the invention is applicable to networks with parameters different to those assumed for the purposes of illustrating the embodiments.
- 15
- 20 The first embodiment is directed towards a method for calculating the optimal number of BTSs in a cellular network. A flow chart of the method of the first embodiment is shown in figure 5.

- The first step shown in figure 5 is to calculate the number of BTSs required to support the desired number of subscribers, or traffic (s11). The number of BTSs required to service the desired number of subscribers, or traffic, is calculated for a range of loading factor values. The results are presented in the graph shown in figure 2.
- 25

Next, the number of BTSs required to cover the service area is calculated (s12). Again, the number of BTSs required to cover the service area is calculated for a

range of loading factor values. The results for the region C are shown in a graph in figure 3.

Next, the method determines a value for loading factor that minimises the difference in the number of BTSs required to support the desired number of subscribers and the number of BTSs required to cover the service area (s13).

As can be seen from figures 2 and 3, the number of BTSs varies greatly with the loading factor. Simply arbitrarily selecting a value for the loading factor is unlikely to achieve an optimal result. Instead, the method of the embodiment selects a value for the loading factor where the graphs shown in figures 2 and 3 intersect.

10 Figure 4 is a graph in which the graphs shown in figures 2 and 3 have been superimposed. The graph from figure 2, representing the number of BTSs required to service the desired number of subscribers is labelled with the numeral 1. The graph from figure 3, representing the number of BTSs required to cover the service area is labelled with the numeral 2.

15 As seen in figure 4, the number of BTSs required to accommodate the desired number of subscribers and cover the service area meet at a position where the loading factor value is 60%. Therefore, 60% is determined as the optimal value for loading factor in the embodiment.

Finally, the method calculates the optimal number of BTSs (s14). From any one of figures 2, 3 or 4 it can be seen that the number of BTSs required is 100 when the loading factor value is 60%. It should be appreciated that the graphs shown in figures 2, 3 and 4 will vary according to the parameters of the network such as the desired number of subscribers and the service area as well as the morphology of the network.

25 The second embodiment is directed towards a method for determining an optimal value for loading factor in a cellular network. A flow chart of the steps in the method is shown in figure 6. The first step consists of calculating the number of BTSs required to service a desired number of subscribers (s21) in the same manner as described in relation to step s11 of the first embodiment. The next step is calculating the number of BTSs required to cover the service area (s22) in

30



the same manner as described in relation to step s12 of the first embodiment. Finally, an optimal value for the loading factor is determined (s23) in the same manner as described in relation to step s13 of the first embodiment.

It will be appreciated that the embodiments provide an advantage over the prior art in that a systematic method is adopted for determining the number of BTSs required for a network and the loading factor value used in the network. Further, the value for the loading factor is determined taking into consideration the desired number of subscribers and the desired service area.

While the invention is susceptible to various modification and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and detected description. It should be understood, however, that the present invention is not limited to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternative falling within the spirit and scope of the invention as defined by the appended claims.

THE CLAIMS defining the invention are as follows:

1. A method for calculating the optimal number of base transceiver stations in a cellular network covering a service area, comprising the steps of:

5                   calculating a first number of base transceiver stations required to service a desired number of subscribers as a function of a loading factor;

                  calculating a second number of base transceiver stations required to cover the service area as a second function of the loading factor;

10                  selecting a value for the loading factor that minimises the difference between said first number of base transceiver stations and said second number of base transceiver stations; and

                  calculating the optimal number of base transceiver stations using the selected value for the loading factor.

- 15                  2. The method of claim 1, wherein in said selecting step, said value for the loading factor is chosen at a position where the number of base transceiver stations required to service a desired number of subscribers coincides with the number of base transceiver stations required to cover the service area.

3. The method of claim 2, wherein said value for the loading factor is selected as 60%.

- 20                  4. A method for calculating the optimal value for a loading factor in a cellular network covering a service area, comprising the steps of:

                  calculating a first number of base transceiver stations required to service a desired number of subscribers as a function of the loading factor;

25                  calculating a second number of base transceiver stations required to cover the service area as a second function of the loading factor;



selecting a value for the loading factor that minimises the difference between said first number of base transceiver stations and said second number of base transceiver stations.

5. The method of claim 4, wherein in said selecting step, said value for the loading factor is chosen at a position where the number of base transceiver stations required to service a desired number of subscribers coincides with the number of base transceiver stations required to cover the service area.
6. The method of claim 5, wherein said value for the loading factor is selected as 60%.
7. A method for calculating the optimal number of base transceiver stations in a cellular network covering a service area substantially as described herein with reference to figures 2 to 5 of the accompanying drawings.
8. A method for calculating the optimal value for loading factor in a cellular network covering a service area substantially as described herein with reference to figures 2 to 4 and 6 of the accompanying drawings.

Dated this twenty-fourth day of January 2001


Samsung Electronics Co, Ltd  
Applicant

Wray & Associates  
Perth, Western Australia  
Patent Attorneys for the Applicant






FIG. 2

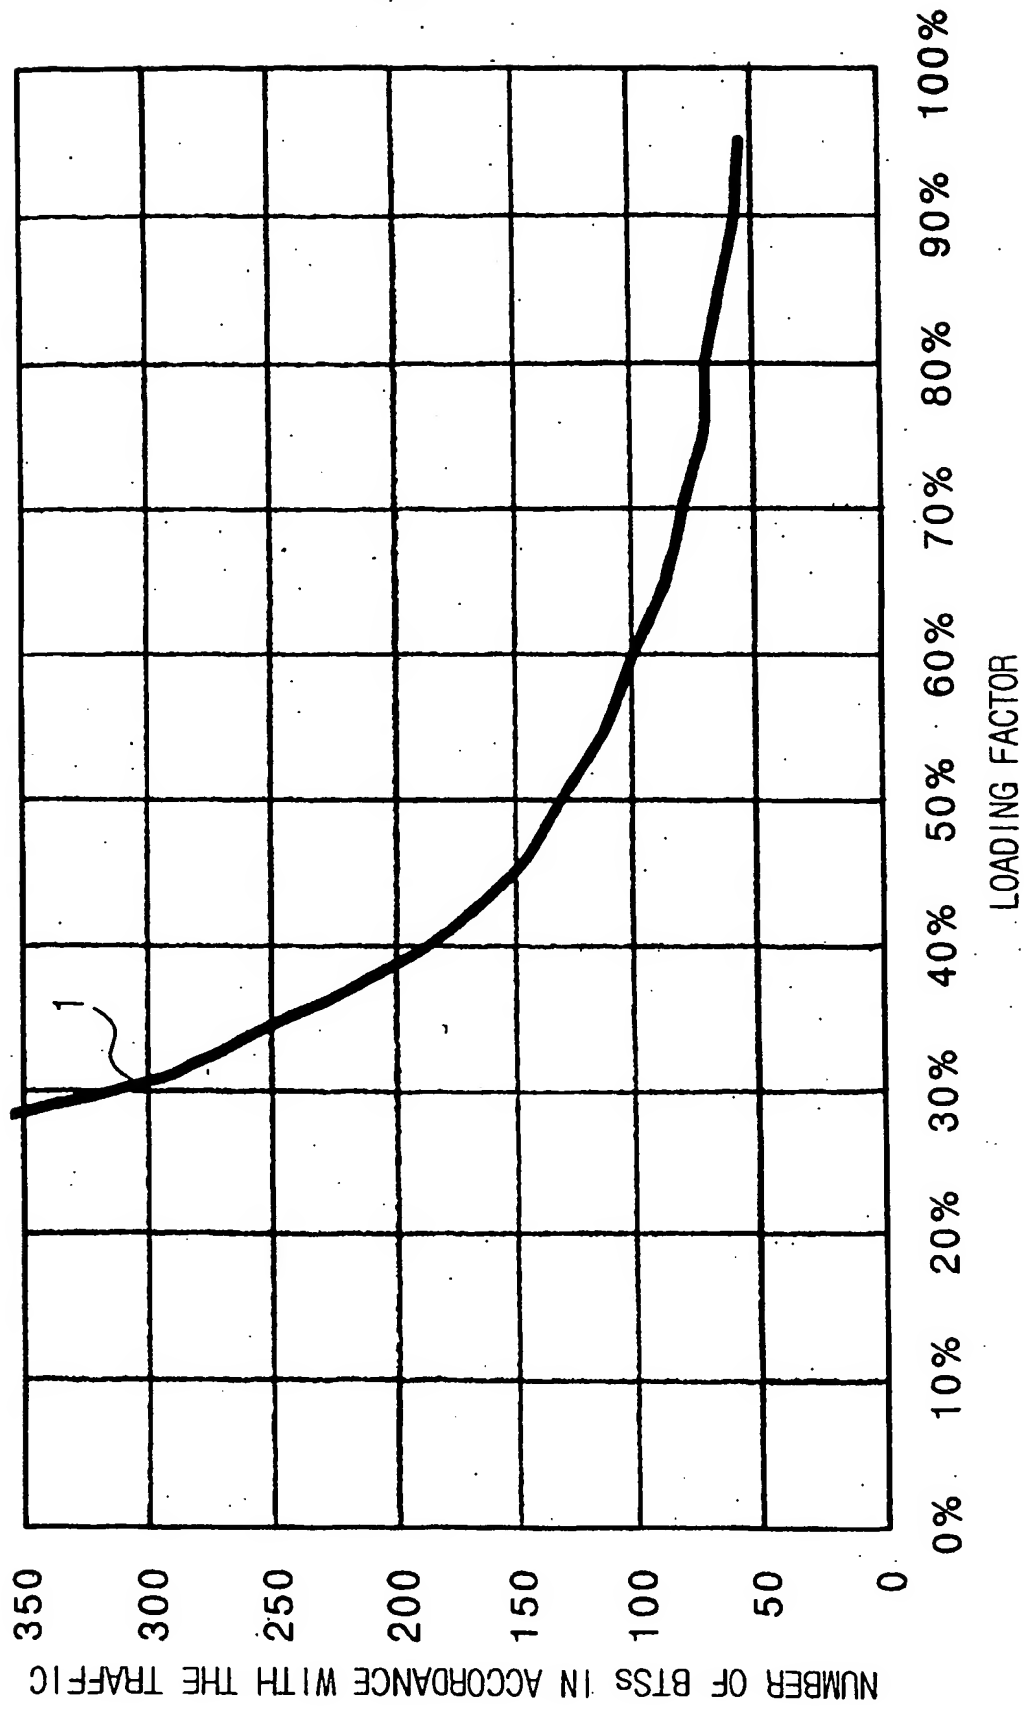

00 05 09 33003

FIG. 3

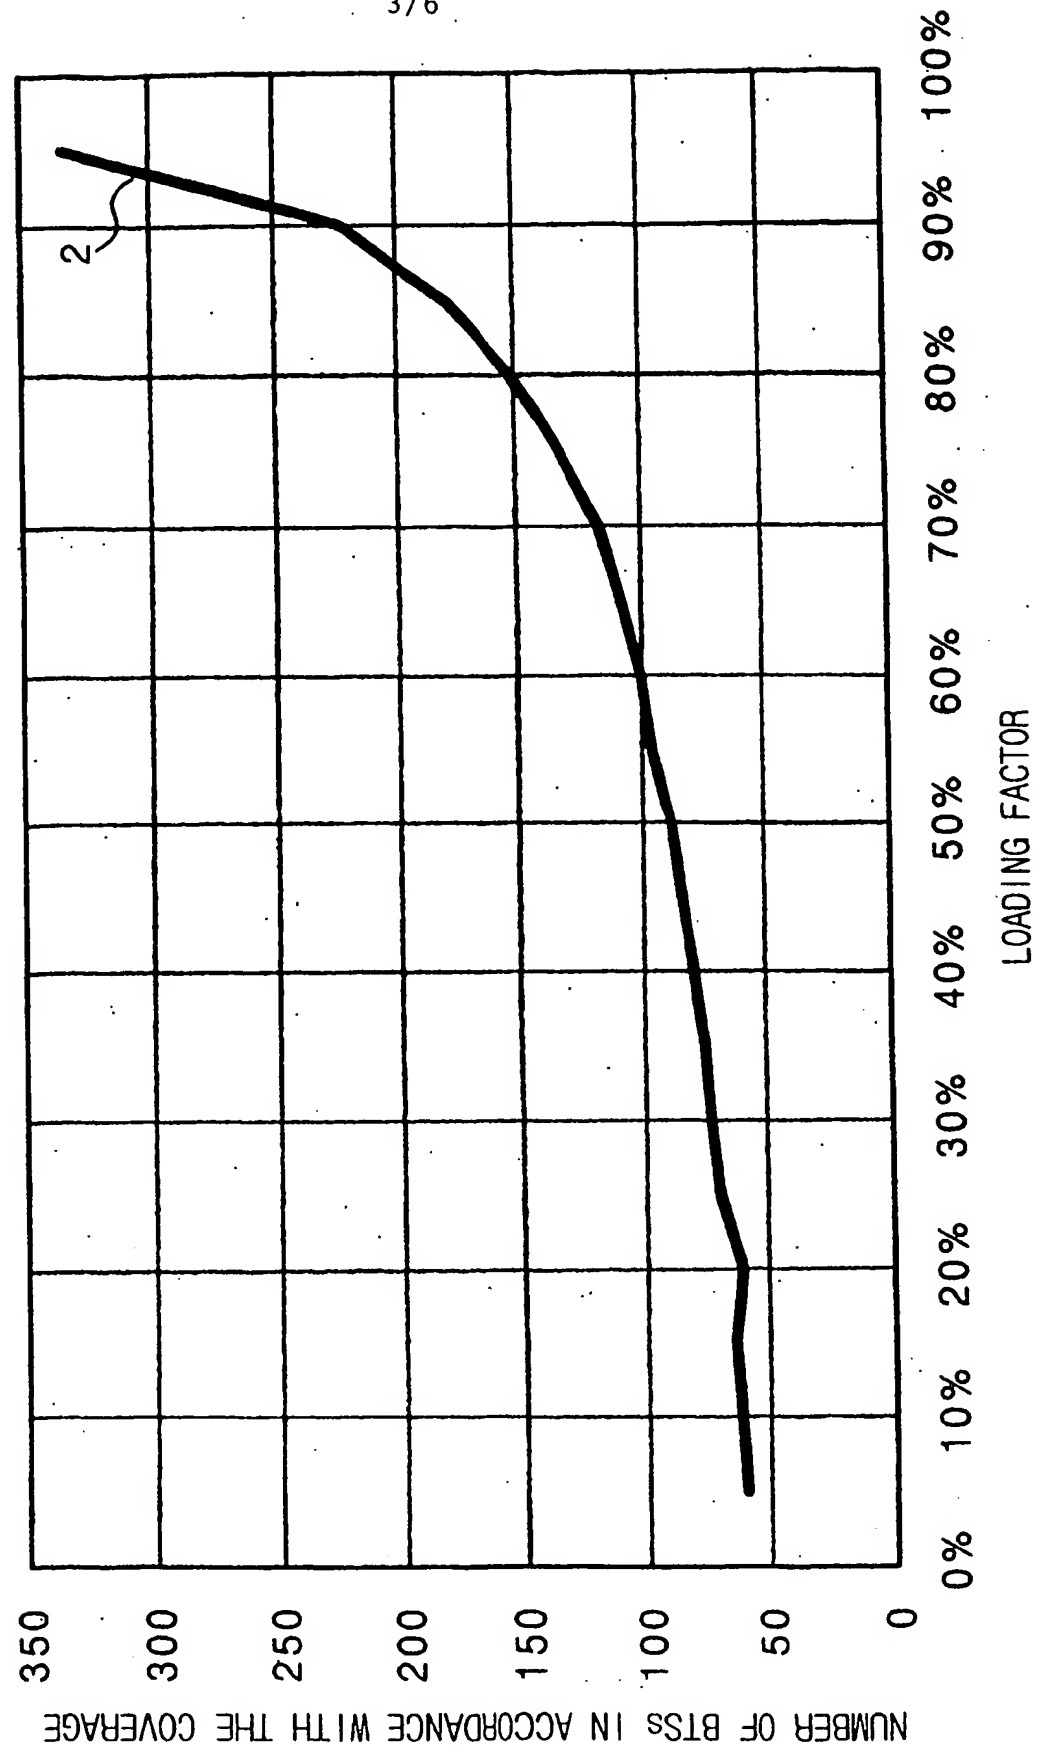

00 00 00 3300

FIG. 4

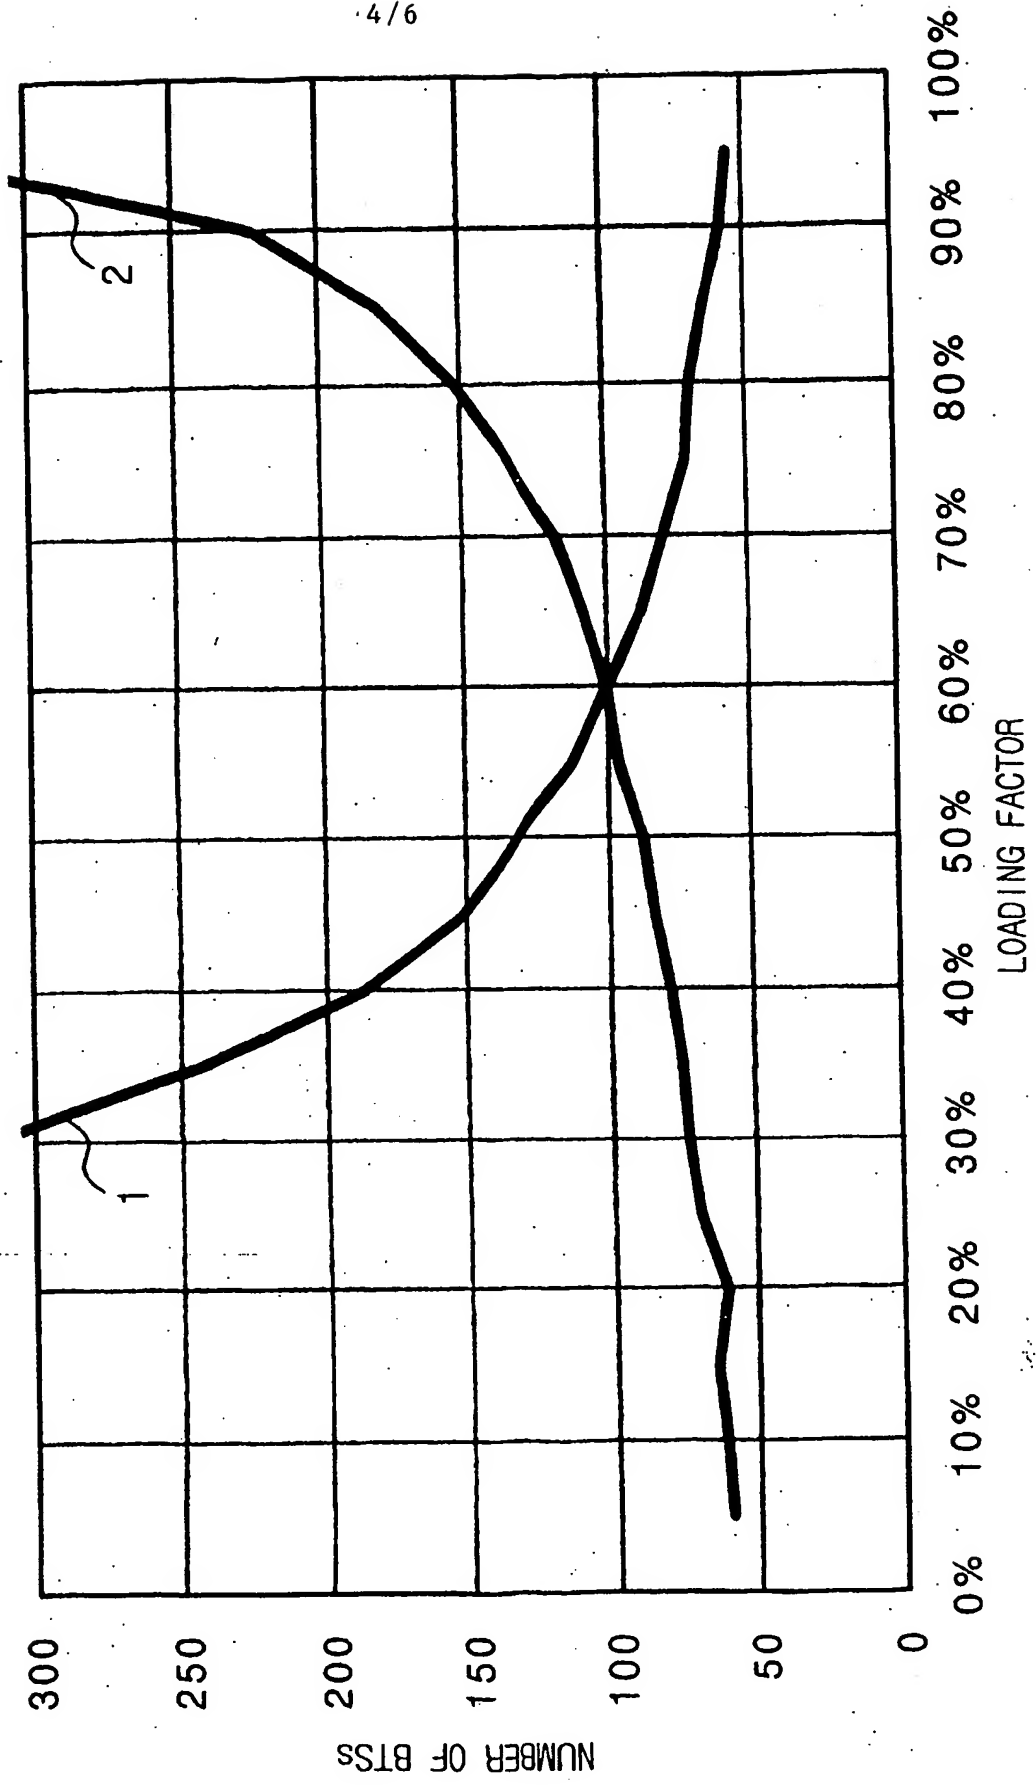


FIG. 5


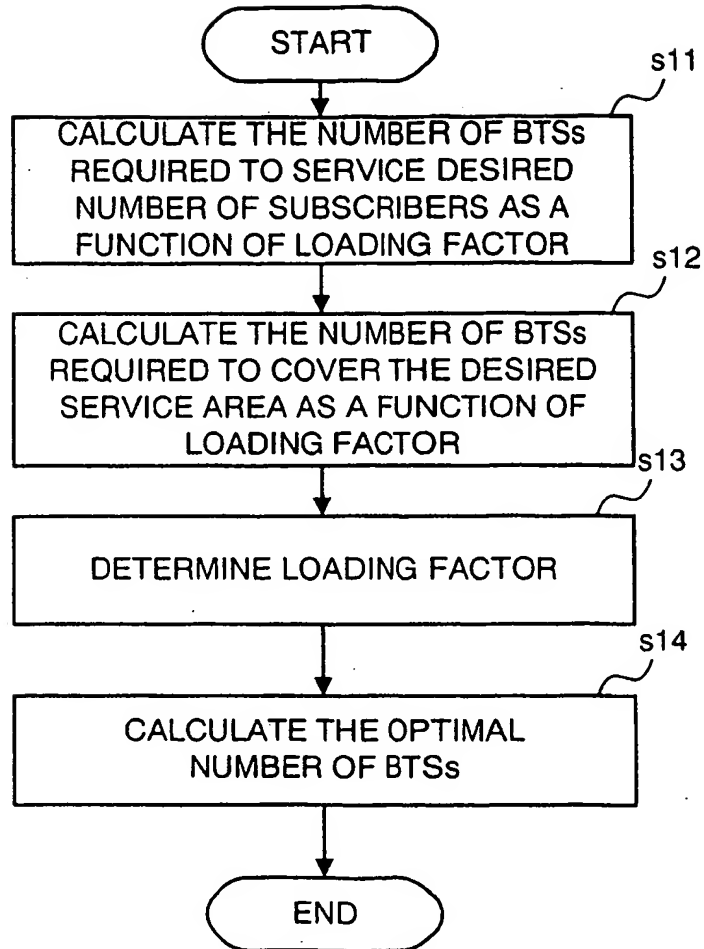




FIG. 6

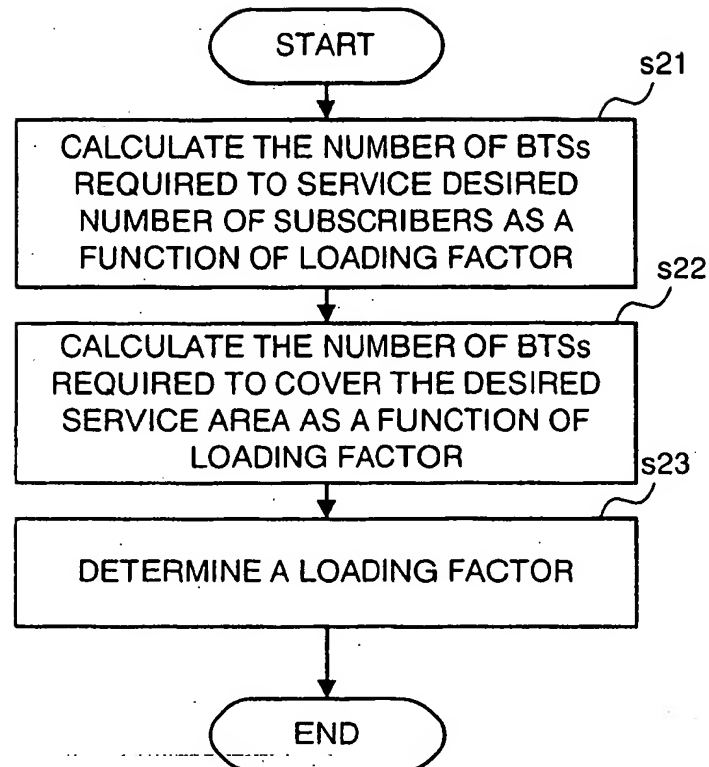

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**